


Step 2 Click **Maintenance** ->**Firmware** click the **Browse** button to choose the firmware you already extracted in the folder.



Step 3 Click the **UPGRADE** button. The device will reboot automatically after the upgrading has been finished. Please wait about 3 minutes.

Step 4 Click **Status**-> **Device Info**, verify that the router's firmware has been upgraded.

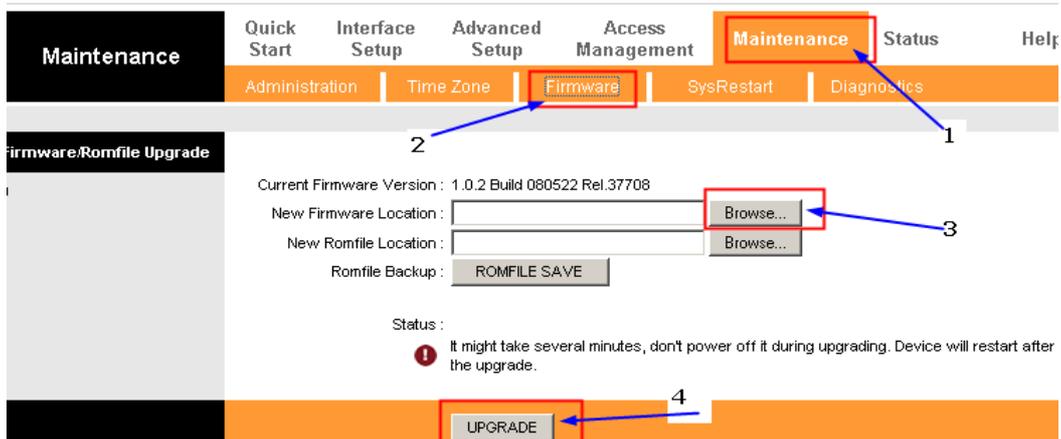

Firmware Version : 1.0.2 Build 080522 Rel.37708
MAC Address : 00:1d:0f:a7:78:87

Step 5 You have to restore the device to factory default to make the new functions take effect; Click **Maintenance**->**SysRestart**, choose **Factory Default Settings**, Click **RESTART** button.

